

2734

ATTORNEY'S DOCKET NO.: S1022/8316

#5

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

gw
12-20-00

Applicant: S1022/8316
Serial No.: 09/517,417
Filing Date: March 2, 2000
For: DSL TRANSMISSION SYSTEM WITH MEANS FOR ENSURING LOCAL ECHO ORTHOGONALITY

Examiner: Unassigned
Art Unit: 2734

Commissioner for Patents
Washington, D.C. 20231

Sir/Madam:

RECEIVED
AUG 11 2000
TC 2100 MAIL ROOM

Transmitted herewith for filing is/are the following document(s):

- ☒ Letter to Examiner
- ☒ Certified Copy of European Priority Application No. 99410014.7
- ☒ Return Post Card

If the enclosed papers are considered incomplete, the Mail Room and/or the Application Branch is respectfully requested to contact the undersigned collect at (617)720-3500, Boston, Massachusetts.

A check in the amount of \$0.00 is enclosed to cover the filing fee. If the fee is insufficient, the balance may be charged to the account of the undersigned, Deposit Account No. 23/2825. A duplicate of this sheet is enclosed.

CERTIFICATE OF MAILING UNDER 37 C.F.R. §1.8(a)

I hereby certify that this document is being placed in the United States mail with first-class postage attached, addressed to the Commissioner for Patents, Washington, D.C. 20231 on August 4, 2000.

Paul Dussell

Attorney Docket No.: S1022/8316
XNDD

Respectfully submitted,

James H. Morris
James H. Morris
Reg. No.: 34,681
WOLF, GREENFIELD & SACKS, P.C.
600 Atlantic Avenue
Boston, Massachusetts 02210
Tel. (617) 720-3500


This Page Blank (uspto)



Europäisches
Patentamt

European
Patent Office

Filed: March 2, 2000
Applicant: Olivier Isson et al.
Art Unit: 2734
Office européen
des brevets

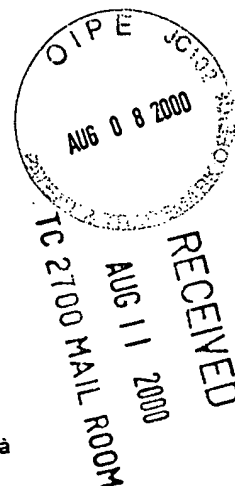

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

99410014.7

**CERTIFIED COPY OF
PRIORITY DOCUMENT**

Der Präsident des Europäischen Patentamts:
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN
THE HAGUE,
LA HAYE, LE

06/04/00

This Page Blank (uspto)



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

**Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation**

Anmeldung Nr.
Application no. 99410014.7
Demande n°

Anmeldetag:
Date of filing: 05/03/99
Date de dépôt:

Anmelder
Applicant(s)
Demandeur(s)
STMicroelectronics S.A.
94250 Gentilly
FRANCE
TELIA AB
123 86 Farsta

SWEDEN
Bezeichnung der Erfindung
Title of the invention
Titre de l'invention

DSL transmission system with means for ensuring local echo orthogonality

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat
State
Pays

Tag
Date
Date.

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation
International Patent classification
Classification internationale des brevets
H04L27/26, H04B3/23

Am Anmeldetag benannte Vertragsstaaten
Contracting states designated at date of filing. AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE
Etats contractants désignés lors du dépôt

Bemerkungen
Remarks
Remarques

This Page Blank (uspto)

DSL TRANSMISSION SYSTEM WITH MEANS FOR ENSURING LOCAL ECHO
ORTHOGONALITY

The present invention relates to digital subscriber line (DSL) transmission systems which allow high speed communication on twisted pair telephone lines, in particular. The invention relates more specifically to a solution for maintaining orthogonality of a local echo.

Figure 1 very schematically shows a DSL transmission system at one end of a telephone line 10. A serial stream of outgoing digital data Dout is provided to a serial-to-parallel converter 12 which extracts N multibit values, each corresponding to a complex frequency domain coefficient. These frequency domain coefficients are provided to an inverse fast Fourier transform (IFFT) circuit 14 which generates, for each set of N coefficients, a time domain symbol. A symbol is thus the sum of N sinusoidal subcarriers of different frequencies, the amplitude and phase of each subcarrier being determined by the corresponding frequency domain coefficient received by the IFFT circuit.

Each symbol is transferred onto telephone line 10 through a hybrid line interface 16. Line interface 16 also receives incoming symbols from line 10. These incoming symbols are provided to a fast Fourier transform (FFT) circuit 18 which extracts the N frequency domain coefficients of each received

symbol. These frequency domain coefficients are arranged into an incoming serial data stream D_{in} through a parallel-to-serial converter 20.

5 A similar structure is provided at the other end of line 10.

The illustrated serial-parallel conversions are for clarification purposes only, since the FFT and IFFT circuits operate, in practice, directly on the serial streams in a pipeline manner.

10 Figure 2 illustrates the spectrum of the signals conveyed on line 10 in such a system. The bandwidth of the telephone line is subdivided in N channels, each corresponding to one frequency domain coefficient as processed by the IFFT and FFT circuits. There are for example $N = 2048$ channels, each
15 having a bandwidth of 5 kHz. The first frequency domain coefficients may be 11 bits wide and thus correspond to 2048 different amplitudes/phases in the time domain. Because of the attenuation undergone by the higher frequencies on the telephone line, the last frequency domain coefficients may only be
20 two bits wide.

A gap shown in figure 2 at the beginning of the spectrum is reserved for "plain old telephone services" (POTS).

Figure 3 shows the spectrum of one subcarrier f_1 conveyed in a symbol. This spectrum is not a discrete value at f_1
25 because the symbol is sampled in a window. The power spectral density thus has a $\sin(x)/x$ (sinc) function shape. To avoid the interference of the lobes of this spectrum with nearby channels, the subcarriers are chosen to be "orthogonal". This means, as shown, that the distance between subcarriers is
30 chosen so that each subcarrier is at a zero crossing of the sinc functions. The sinc functions only depend on the window width, which is constant, and thus have a constant pseudo period and all have zero values at the same frequencies.

In order to avoid near-end and local echo problems,
35 the channels are often used only for unidirectional communica-

tion, whereby, in theory, near-end echoes of outgoing symbols occur in channels not used for the incoming symbols. In practice, there is a main difficulty in implementing this solution, as explained below.

5 Figure 4 shows a stream of outgoing symbols $S_1, S_2...$ on line 10, and a stream of incoming symbols $S'_1, S'_2...$ For clarity reasons, it is supposed that the incoming symbols convey only one subcarrier f_2 and the outgoing symbols convey only one subcarrier f_1 , the subcarriers f_1 and f_2 being adjacent. As shown, the incoming and outgoing symbols are not
10 synchronized, the phase-shift depending essentially on the characteristics of the telephone line 10. The FFT circuit 18 synchronizes its sampling on the incoming symbols, as shown by dotted lines. While each incoming symbol is sampled by FFT
15 circuit 18, the echo of the outgoing signal is also sampled.

 Due to the delay between the incoming and outgoing symbols, the transitions between the outgoing symbols will be sampled in the echoes. Such transitions are discontinuities which have a wide spectrum in the frequency domain. This is
20 shown in figure 3 by dotted lines for subcarrier f_2 . This wide spectrum affects all the nearby channels.

 Figure 5 illustrates a conventional solution, disclosed in PCT patent application WO 97/06619, for avoiding this problem. Each symbol is extended by a cyclic suffix CS which is
25 longer than the delay between the incoming and outgoing symbols. This cyclic suffix is a simple copy of the first portion of the corresponding symbol. (The cyclic suffix mentioned here should not be mistaken with a cyclic prefix conventionally used for other purposes. Such a cyclic prefix, not shown for clarity
30 purposes, corresponds to an end-portion of each symbol placed in front of the symbol.)

 As shown, the incoming symbols are sampled outside the cyclic suffixes CS. In this manner, the system samples the echo of a portion of each outgoing symbol followed by a portion
35 of its cyclic suffix CS, and does not see a transition between

two symbols. As a consequence, the sampled echo remains orthogonal, i.e. each subcarrier in the sampled echo has the sinc-shaped spectrum shown in continuous line in figure 3 and not the wide spectrum shown in dotted line.

5 A drawback of this solution is that it needs the transmission of a cyclic suffix for each symbol, which suffix is a duplication of a portion of the corresponding symbol, often 5% of the symbol. This inevitably reduces the transmission throughput of the system by at least 5%.

10 It could be devised to cancel the local echo in order to omit the use of a cyclic suffix. Moreover, a local echo canceling would allow each channel to be used in full duplex mode, i.e. in both transmission directions.

15 Theory on how to design adaptive filters, such as Finite Impulse Response filters (FIR) used in echo-cancellers, is provided in the manual "Adaptive Filter Theory" by S. Haykin, Prentice-Hall, New Jersey, 1991.

20 The use of an echo-canceller would dramatically increase the throughput of the system but the hardware requirements may increase more than the throughput gain obtained. Indeed, an adaptive filter used for echo-cancellation in a DSL transmission system should be designed to store all the time domain samples of a currently processed symbol and for adaptively calculating weighting coefficients for a large
25 number of samples, reaching 1000 if the symbol has more than 1000 samples. The complexity of the algorithm is proportional to the product of the size of the filter by the number of weighting coefficients to calculate, since all the weighting coefficients are recalculated each time a new sample is received.
30 The number of samples of a symbol is equal to double the order of the FFT, i.e. the number of channels used.

35 An object of the present invention is to provide a DSL transmission system of particularly simple structure avoiding the use of cyclic suffixes for making the local echo orthogonal.

This object is achieved by a digital subscriber line transmission system comprising an inverse fast Fourier transform circuit generating successive outgoing time domain symbols on a subscriber line from respective groups of digital frequency domain coefficients; a fast Fourier transform circuit generating groups of digital frequency domain coefficients from respective incoming time domain symbols received on the subscriber line, a current incoming symbol being delayed with respect to a current outgoing symbol by a predetermined time interval; and means for, during an end portion of a current incoming symbol, subtracting from the signal received on the subscriber line an estimated echo obtained by a filter from a signal portion following the end of the current outgoing symbol, and adding thereto, through said filter, a beginning portion of the current outgoing symbol, wherein said portions have a duration at least equal to said predetermined time interval.

According to an embodiment of the invention, the filter is a finite impulse response filter having a size adapted for processing samples of the symbols only during said predetermined time interval, comprising means for continuously calculating filter coefficients from the signals received and transmitted on the subscriber line.

According to an embodiment of the invention, the predetermined time interval is equal to a maximum delay between the incoming and outgoing symbols.

According to an embodiment of the invention, the system comprises a FIFO memory receiving the outgoing symbols; a subtractor arranged for subtracting the outgoing symbols from the output of the delay line; said filter receiving the output of the subtractor and enabled only during said time interval from the end of each outgoing symbol; and an adder receiving the output of the filter and said incoming symbols.

According to an embodiment of the invention, the FIFO memory has a size for storing only the beginning portion of

each outgoing symbol, is write-enabled during said time interval from the beginning of each outgoing symbol, and read-enabled during said time interval from the end of each outgoing symbol.

5 These objects, features, aspects and advantages of the invention will become apparent from the following detailed description of embodiments, given by way of illustration and not of limitation with reference to the accompanying drawings.

10 Figure 1, previously described, schematically shows a DSL transmission system;

 figure 2 illustrates a subdivision of the telephone line bandwidth in several channels used in DSL systems;

 figure 3 illustrates the spectrum of a sampled sub-carrier and of a near-end echo;

15 figure 4 illustrates bare incoming and outgoing symbols on a telephone line;

 figure 5 illustrates incoming and outgoing symbols with cyclic suffixes on a telephone line;

20 figure 6 illustrates the principle of the present invention with the aid of incoming and outgoing symbols in the time domain;

 figure 7 schematically shows an embodiment of the circuit according to the invention implementing the principle of figure 6 ; and

25 figure 8 illustrates incoming symbols with cyclic prefixes on a telephone line.

 In order to make a local echo orthogonal without the use of a cyclic suffix for each symbol, the present invention replaces, in the echo signal, the contribution of the beginning portion of each symbol by the contribution of the beginning portion of the preceding symbol, which is equivalent to using cyclic suffixes without the cyclic suffixes being present in the signal.

35 Figure 6 shows successive incoming and outgoing symbols in the time domain, such as they appear at the input IN of

FFT circuit 18 and at the output OUT of IFFT circuit 14 (figure 1). The incoming symbols are delayed by a time interval δ and they are illustrated with the local echo $h(.)$ generated by the outgoing symbols.

5 As shown, a current incoming symbol $S'n$ overlaps a large end portion of the echo $h(Sn)$ of a current outgoing symbol Sn and a small beginning portion $h(Xn+1)$ of the echo of the next outgoing symbol $Sn+1$.

10 The purpose of the invention is to replace the echo portion $h(Xn+1)$ by a portion of same length $h(Xn)$ of the beginning of the echo of symbol Sn .

15 In practice, the echo portion $h(Xn+1)$ is subtracted from the end portion of the currently received symbol $S'n$ while the echo portion $h(Xn)$ is added thereto. Thus, a new input signal IN' is generated in which the incoming symbol $S'n$ coincides with echo portions belonging to a same outgoing symbol, whereby the orthogonality is preserved.

20 Since the echo of the outgoing symbols is unknown, the transfer function h of the echo generation should be estimated, like in a conventional echo-canceller. The estimated transfer function is designated h^* . As symbolized in figure 6, this estimated transfer function h^* is used for calculating, from the outgoing signal, the echo portions to add to, and subtract from, the incoming signal.

25 In contrast to a conventional echo-canceller, the echoes are calculated according to the invention only for small portions of each symbol, not exceeding 5%. As a consequence, the size of the FIR filter to use is chosen to store only 5% of the samples of each symbol. The number of weighting coefficients to calculate does not exceed the size of the filter. For
30 example, if the symbols to process have 4096 samples, the filter will have a size of 200, whereby the number of weighting coefficients to calculate is also 200. The complexity of the calculation algorithm has a factor $200^2 = 40,000$, instead of
35 the conventional factor of $1000 \times 4096 = 4,096,000$.

Of course, the length of the above echo portions, thus the size of the filter, should at least be equal to the delay δ between the incoming and outgoing symbols. Since this delay δ depends on various parameters, such as the subscriber
5 line length, the length of the filter is chosen equal to the maximum delay, which is in fact the length conventionally chosen for the cyclic suffixes. However, if the delay δ is shorter than the maximum value, it is possible to correspondingly reduce the number of weighting coefficients to calculate.

10 Figure 7 schematically shows an embodiment of a circuit implementing the principle described in relation with figure 6. The outgoing time domain symbols S, i.e. the output OUT of IFFT circuit 14 of figure 1, are provided to a digital delay line 80 which introduces a delay of one symbol. The
15 outgoing symbols S are also subtracted from the output of the delay line 80 by a subtractor 82. Subtractor 82 thus provides the difference between an outgoing symbol S_n and the next outgoing symbol S_{n+1} . This difference is provided to an FIR filter 84 which is adjusted to have the estimated transfer
20 function h^* of the local echo generation.

As previously mentioned, filter 84 is designed to operate only on a number of samples corresponding to delay δ or the maximum value thereof. When filter 84 does not receive samples for which an echo should be estimated, it is held at a
25 reset state so that it provides value zero. An exemplary reset signal RST is illustrated in figure 6. It is inactive from the beginning of each outgoing symbol for a duration corresponding to the maximum value of delay δ .

In fact, with the structure of figure 7, filter 84
30 estimates the echo of the difference of two symbol portions (the subtraction is achieved by element 82 before the filter) which, since the filter is linear, is equivalent to the subtraction of the echoes of the two portions.

The output of filter 84 is provided to an adder 86
35 which also receives the incoming symbols S' affected by the

non-orthogonal echo. Adder 86 provides the input signal IN' of FFT circuit 18, which signal has the desired orthogonal echo.

The necessary weighting coefficients for filter 84 are provided by a calculating element 88 which implements a
5 conventional echo-canceller algorithm using the input and output signals IN and OUT . Since this calculation algorithm does not depend on the output of the filter, the calculation may continue even during the periods when filter 84 is inactive. The weighting coefficients being evaluated by successive
10 iterations, this permanent operation of the algorithm will allow a faster convergence of the weighting coefficients, especially at start-up of the system.

Since filter 84 is operative only during short time periods, at the beginning of each outgoing symbol, it is not
15 necessary to store a whole symbol in delay line 80. Delay line 80 may be chosen of a size adapted to storing only the necessary portion of each symbol. In this case, delay line 80 is enabled only during the periods when the reset signal RST of the filter is inactive.

20 For sake of clarity, conventional cyclic prefixes were not considered in the above description. Such prefixes are however used most of the time.

In figure 8, cyclic prefixes CP are added to the symbols. This figure shows the incoming signal IN affected by the
25 echo of the outgoing signal. A current incoming symbol $S'n$ overlaps the echo of the current outgoing symbol S_n and of the prefix of the next outgoing symbol S_{n+1} . In this case, it is the echo of the prefix of the next outgoing symbol that is replaced by the echo of the beginning portion of the current
30 outgoing symbol.

In fact, as a general rule for signals with or without cyclic prefixes, the echo portion coming after the echo of an outgoing symbol is replaced by the echo of the beginning portion of the outgoing symbol.

The delay line 80 is in fact a FIFO memory which is write enabled at least for time δ from the beginning of each outgoing symbol and read enabled when filter 84 is operative, i.e. for at least time δ from the end of each outgoing symbol.

5 Corresponding write, read, and reset signals W, R, RST are shown in figure 8.

CLAIMS

1. A digital subscriber line transmission system comprising:

• an inverse fast Fourier transform (IFFT) circuit (14) generating successive outgoing time domain symbols (S) on a subscriber line from respective groups of digital frequency domain coefficients;

• a fast Fourier transform (FFT) circuit (18) generating groups of digital frequency domain coefficients from respective incoming time domain symbols (S') received on the subscriber line, a current incoming symbol being delayed with respect to a current outgoing symbol by a predetermined time interval (δ);

characterized in that it comprises means (82) for, during an end portion of a current incoming symbol, subtracting from the signal (IN) received on the subscriber line an estimated echo obtained by a filter (84) from a signal portion (X_{n+1}) following the end of the current outgoing symbol, and adding thereto, through said filter, a beginning portion (X_n) of the current outgoing symbol, wherein said portions have a duration at least equal to said predetermined time interval.

2. The system of claim 1, characterized in that the filter (84) is a finite impulse response filter having a size adapted for processing samples of the symbols only during said predetermined time interval, comprising means (88) for continuously calculating filter coefficients from the signals received (IN) and transmitted (OUT) on the subscriber line.

3. The system of claim 1, characterized in that the predetermined time interval is equal to a maximum delay between the incoming and outgoing symbols.

4. The system of claim 1, characterized in that it comprises:

• a FIFO memory (80) receiving the outgoing symbols;

• a subtractor (82) arranged for subtracting the outgoing symbols from the output of the delay line;

- said filter (84) receiving the output of the subtractor and enabled only during said time interval from the end of each outgoing symbol; and

- an adder (86) receiving the output of the filter

5 and said incoming symbols.

5. The system of claim 4, characterized in that the FIFO memory (80) has a size for storing only the beginning portion of each outgoing symbol, is write-enabled during said time interval from the beginning of each outgoing symbol, and

10 read-enabled during said time interval from the end of each outgoing symbol.

DSL TRANSMISSION SYSTEM WITH MEANS FOR ENSURING LOCAL ECHO
ORTHOGONALITY

Abstract

A digital subscriber line transmission system comprising an IFFT circuit (14) generating successive outgoing time domain symbols (S) on a subscriber line from respective groups of digital frequency domain coefficients; an FFT circuit
5 (18) generating groups of digital frequency domain coefficients from respective incoming time domain symbols (S') received on the subscriber line, a current incoming symbol being delayed with respect to a current outgoing symbol by a predetermined time interval (δ); and means (82) for, during an end portion of
10 a current incoming symbol, subtracting from the signal (IN) received on the subscriber line an estimated echo obtained by a filter (84) from a signal portion (X_{n+1}) following the end of the current outgoing symbol, and adding thereto, through said filter, a beginning portion (X_n) of the current outgoing
15 symbol, wherein said portions have a duration at least equal to said predetermined time interval.

fig 7

This Page Blank (uspto)

1/4

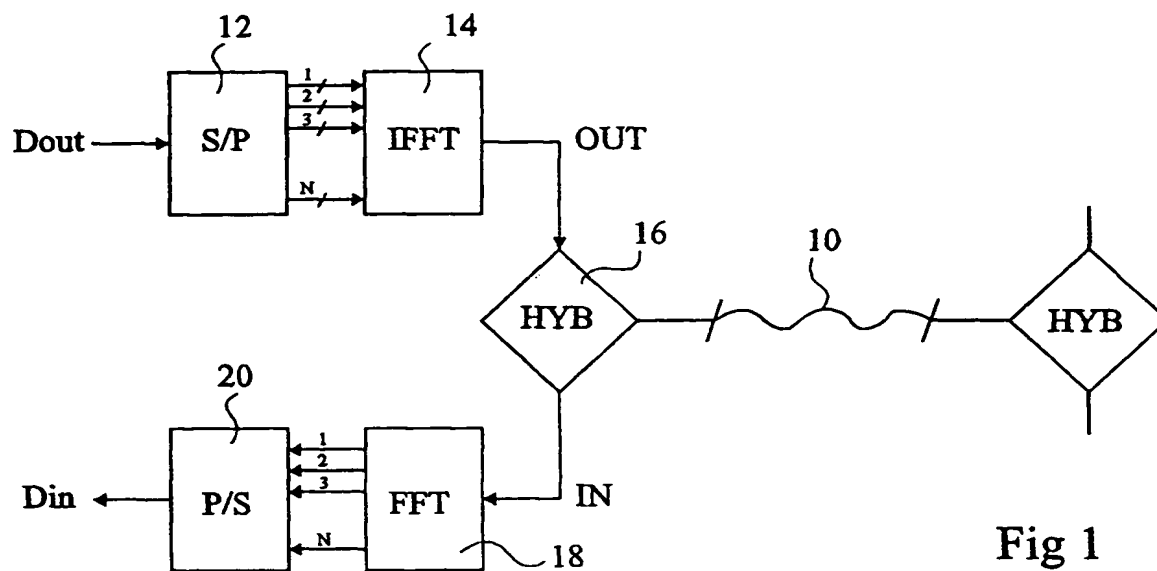


Fig 1

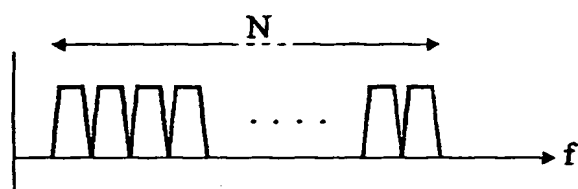


Fig 2

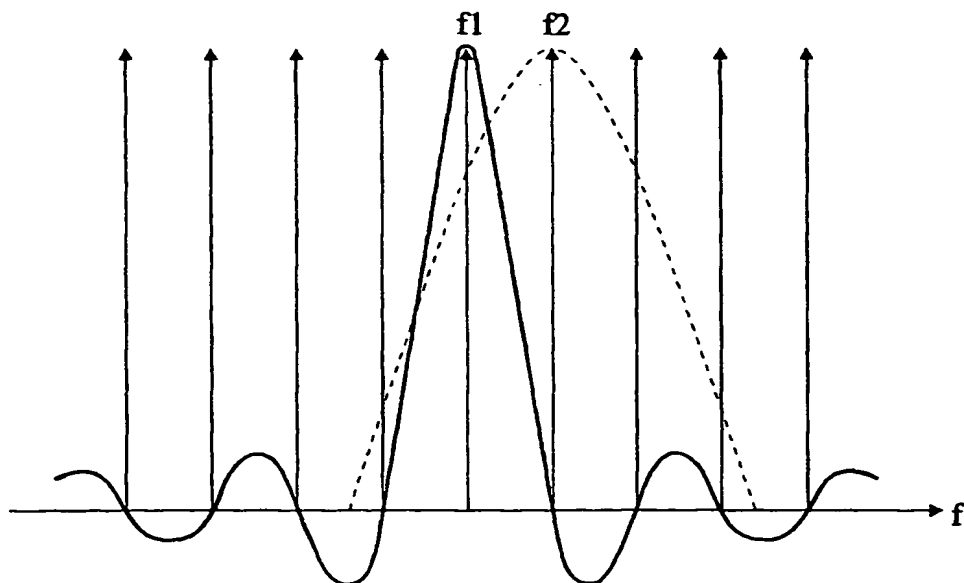


Fig 3

2/4

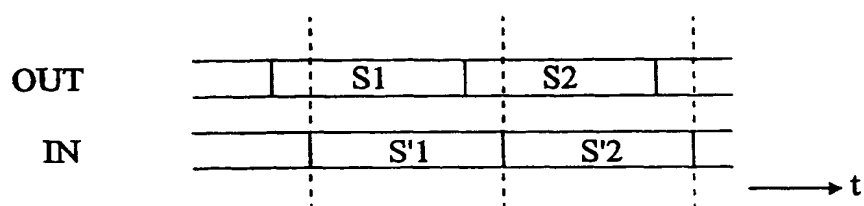


Fig 4

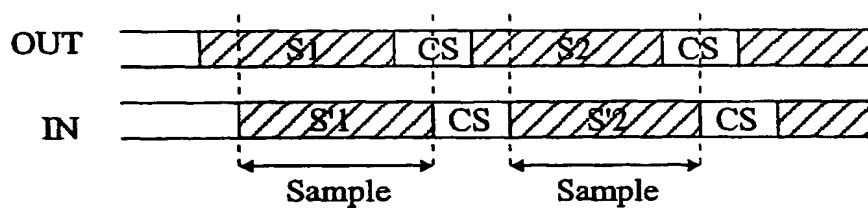


Fig 5

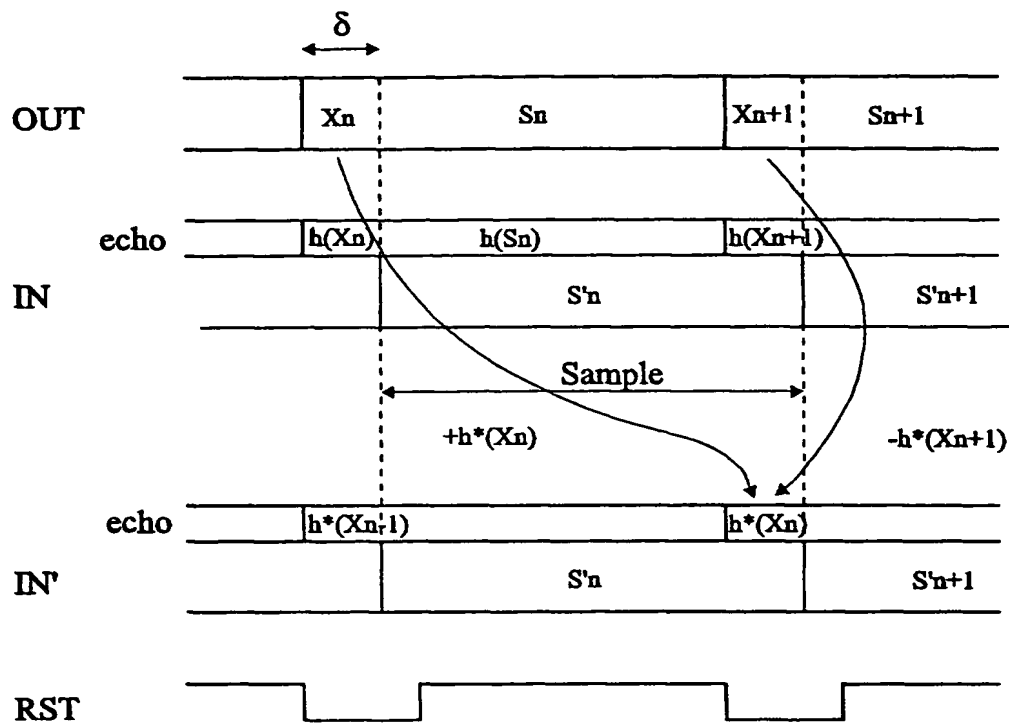


Fig 6

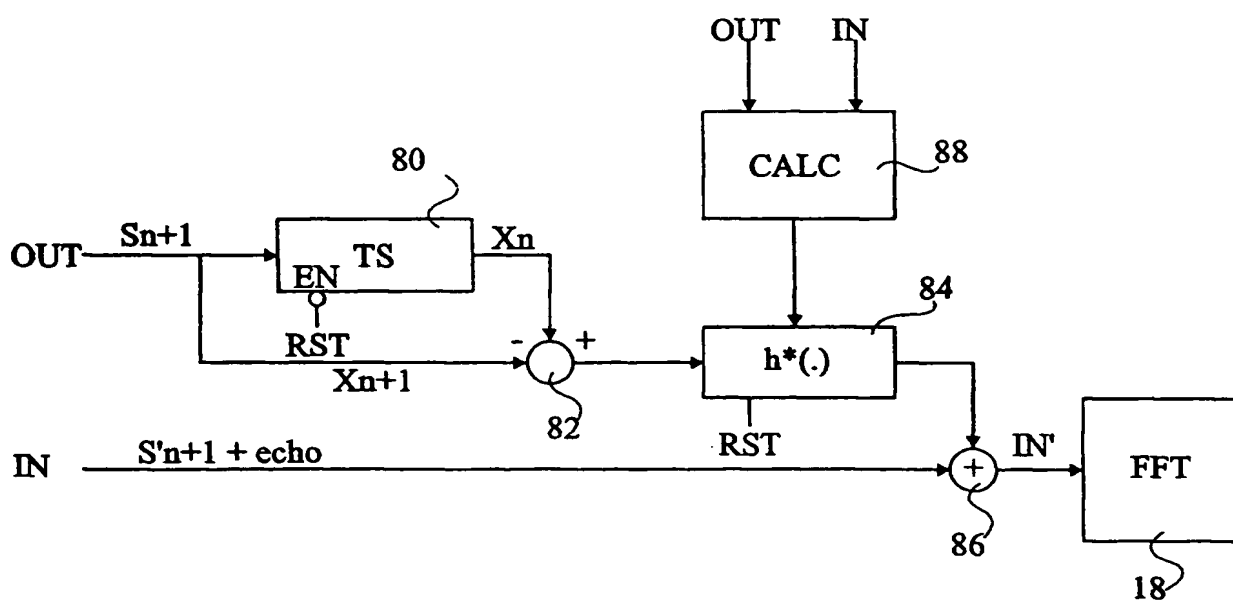


Fig 7

4/4

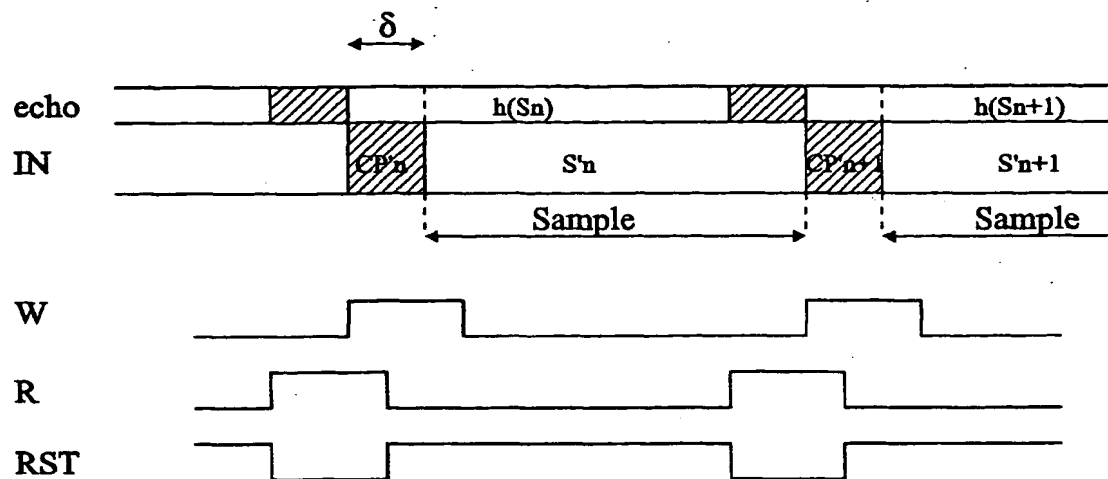


Fig 8